



## **DURA CINDERBLOCK 3 PANELS**



#### The top panel edge has a 10mm mortar line gap.

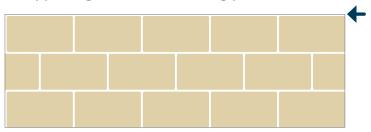


#### Dura CinderBlock 3 looks best installed with alternate rows offset.

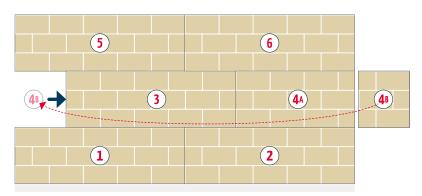

#### What happens if I use a stacked layout?


A stacked layout will disrupt the brick pattern.

Panel edges may be more visible.

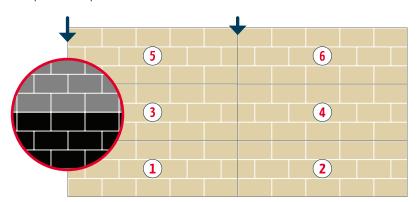

## <u>\</u> 1300 665 341





#### Come and visit our showroom 1/79 Lara Way, Campbellfield, VIC 3061

### **HOW TO PREPARE**

Follow these simple instructions to prepare your **Dura CinderBlock 3** panels for installation.

#### **BEFORE YOU START**

Make sure all *Dura CinderBlock 3* panels are the right way up. Panels need to be installed with the 10mm mortar line **at the top**.

#### Work out the brick pattern

Install *Dura CinderBlock 3* using an **offset layout** to get an authentic brick pattern.

Offset alternate panel rows  $1\frac{1}{2}$  bricks. At the end of the row cut off the panel overhang. Use the off-cut to fill the offset gap.

#### **PREPARATION**

To prepare your panels before installing:

- 1 Ensure panel edges are free of excess brick.
- 2 Cut part panels required using a masonry disc in a circular saw or angle grinder.
- 3 Mitre corners at 45 degrees.

#### **ADDITIONAL OUTDOOR PREPARATION**

DuraBric panels can be installed on an outside wall to create an authentic brick finish. But, it is important the DuraBric panels **do not get wet**.

Panels **MUST** be completely sealed with an acrylic waterproof/membrane paint before installing.

The paint must be applied to the whole panel as per the manufacturer's guidelines.

We recommend <u>Crommelin Fix & Finish</u> (available at Bunnings) which comes in 8 pre-mixed colours.

Alternatively, white can be tinted to the required colour or a different finish applied over the painted panels after installation.

To prepare for outdoor installation:


- 1 Make sure panels and substrate are dry.
- 2 Use non-corrosive stainless steel or galvanised screws.
- 3 Seal the panels completely front, back and sides with an acrylic waterproof/membrane paint (like *Crommelin Fix & Finish*) to protect from getting wet after installation.




# **DURA CINDERBLOCK 3 PANELS**



Install the bottom panels first and work up towards the ceiling, offsetting alternate rows.

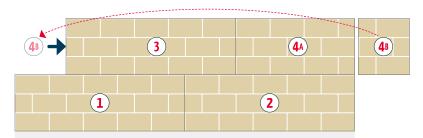

Panels should be butt-joined horizontally. Half bricks at ends of each panel will align to create full bricks.



Sink 10-12 screws into the panel brickface, not the mortar lines.





### HOW TO INSTALL

After preparing your **Dura CinderBlock 3** panels (see over) follow these easy installation instructions.

#### **INSTALLATION**

If installing DuraBric panels outdoors make sure you have completed the **ADDITIONAL OUTDOOR** PREPARATION (see over for details).

- 1 Install panels over a continuous substrate such as plaster, 6-8mm bracing ply, Gyproc or Blueboard.
- 2 Start by installing the bottom row first and work up to the top.
- 3 Panels need to be butt-joined. Half bricks on each panel will align to create one full brick.
- To fix panels in place screw through the brickface **not** through the mortar lines – 10-12 screws per panel is recommended.
- 5 Sink screws approx. 2mm into the brickface
- 6 Conceal all screw holes and corner gaps with filler provided.
- 7 Filler supplied is ready to use do not add water.
- To remove excess filler, sand with an off-cut piece of DuraBric, brickface-to-brickface.

#### **HOW TO FINISH**

All DuraBric panels are supplied unfinished. For information and ideas on how to finish DuraBric panels scan the QR code.



Need some inspiration? Visit the DuraBric Gallery.





















**BLANK CANVAS** LIGHTWEIGHT

NON-TOXIC **AUSTRALIAN MADE** 

FAST & EASY INSTALL

**TACTILE** 

**G1 FIRE SAFETY RATING**